PART OF:

DRAWN TO BE READ IN CONJUNCTION WITH BS308

THIRD ANGLE PROJECTION

DO NOT SCALE IF IN DOUBT ASK

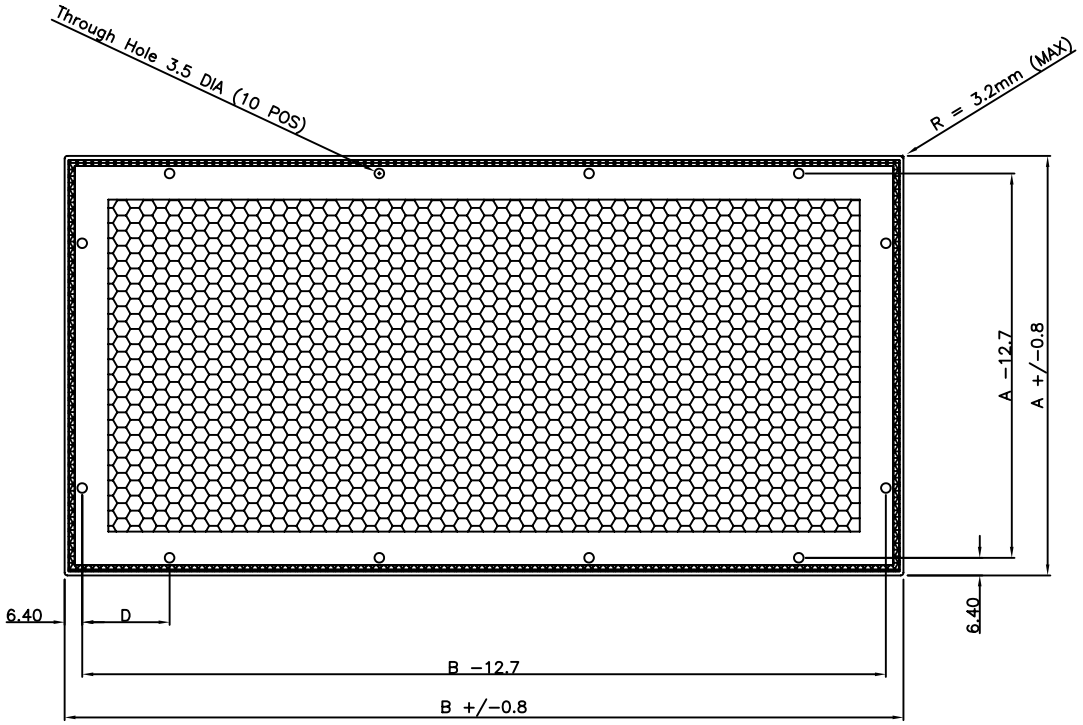

NOTES:
Frame:
962 Frame Style
Aluminium Extrusion

Surface Finish
Alocrom 1200
(or Equivalent)

Honeycomb
MIL C 7438 Alloy 5052

Monel Wire Mesh

Shielding Vent Dimensions

Part No	Outer Dims		Fasteners Vert.			Fasteners Hor.		
	A	B	No.	C	Spacing	No.	D	Spacing
1016-1016-4	101.6	101.6	1	44.5	-	1	44.5	-
1016-2032-8	101.6	203.2	1	44.5	-	3	19.05	76.2
1270-1270-6	127.0	127.0	1	57.2	-	2	19.05	76.2
1270-2540-8	127.0	245.0	1	57.2	-	3	31.75	88.9
1524-1524-8	152.4	152.4	2	25.4	88.9	2	25.4	88.9
1524-3048-12	152.4	304.8	2	25.4	88.9	4	31.75	76.2
1778-1778-8	177.8	177.8	2	38.1	88.9	2	38.1	88.9
1778-3556-12	177.8	355.6	2	38.1	88.9	4	38.1	88.9
2032-2032-10	203.2	203.2	2	50.8	88.9	3	19.05	76.2
2032-4064-16	203.2	406.4	3	19.05	76.2	5	31.75	82.6
2540-2540-12	254.0	254.0	3	31.75	88.9	3	31.75	88.9
3048-3048-16	304.8	304.8	4	31.75	76.2	4	31.75	76.2

All dimensions in mm (Inch)

ISS	CHANGE DESCRIPTION	APP.	DATE
A	ORIGINAL		

SCALE: NTS | DRAWN: PW | DATE: 03/12/09

TOLERANCES: (UNLESS OTHERWISE STATED)
OVERALL +/− 0.8
HOLE CENTRES +/− 0.2

CHECKED | DATE

DRG.No. (See Table)

SHT. 1 OF 1

MATERIAL:

TITLE
HONEYCOMB VENT

CAD generated drawing do not alter manually

SHIELDING SOLUTIONS LTD